



Securi-Dor AP2007 automatic bottom locking system for side hinged doors

For use with side hinged door operating arms type AP2006 only

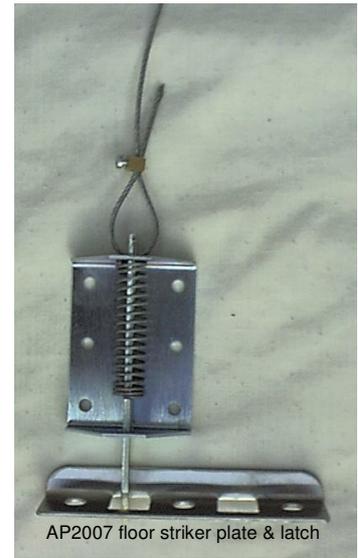

FITTING INSTRUCTIONS

1. Install the main AP2006 barn door arm kit according to the fitting instructions supplied
2. Check that the doors close properly, it is essential that the doors meet at the bottom to ensure correct floor bolt operation.
3. Fit the cable stop to the Mk2 actuator arm, then attach the cable inner to the cable lug & secure with the M5 screw & penny washer supplied, pass the cable through the cable stop and fit the outer cable as shown above.
4. Fix the bottom bolt assy. to the door that closes last, with back plate 5mm from the door edge and 25mm up from the floor. With the doors held fully shut by the motor, position the floor striker plate as shown in Fig.1 below, then move it forward about 5mm (*pushing doors open slightly*) secure it in this position with the three No10 screws & masonry plugs supplied.

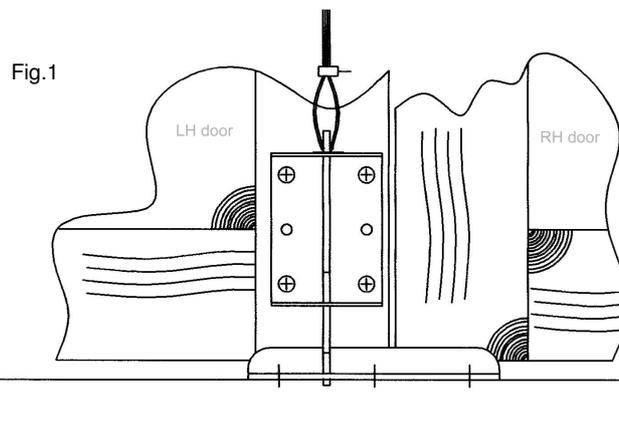

5. Fit the cable stop bracket to the door, pass the cable through it and attach it to the floor bolt using the clamp supplied. close the doors with the motor, then adjust the cable length so that the bottom latch bolt is engaged onto the floor striker plate by **10mm**.
6. Apply grease to the sliding latch and make final adjustments and check that the latch engages when the door is closed by the electric operator, and releases prior to opening. Note: check the safety-stop system and make adjustments to the trip sensitivity. The motor must reverse if the doors are obstructed while closing (*see step 2 of the AP2006 Mk2 fitting instructions*)

Also available: Securi-Dor AP2000

For the automation of the original manual latches on remote controlled one-piece retractable garage doors



Amourelle Products, Unit 16 James Scott Rd, Halesowen, West Midlands B63 2QT
www.amourelle.co.uk ☎ 01384 900 264